

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 1 033 290 A2

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
06.09.2000 Bulletin 2000/36

(51) Int. Cl.⁷: **B60R 21/01**

(21) Application number: 00200408.3

(22) Date of filing: 07.02.2000

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE**
Designated Extension States:
AL LT LV MK RO SI

(30) Priority: 01.03.1999 US 260224

(71) Applicant:
Delphi Technologies, Inc.
Troy, MI 48007 (US)


(72) Inventors:
• **Fultz, William**
46033 Indiana (US)

• **Griffin, Dennis**
46060 Indiana (US)
• **Perisho, Robert Jr.**
46979 Indiana (US)
• **Thayer, Peter**
46060 Indiana (US)
• **Wu, Cunkai**
46902 Indiana (US)

(74) Representative:
Denton, Michael John
Delphi Automotive Systems
Centre Technique Paris
117 avenue des Nations
B.P. 60059
95972 Roissy Charles de Gaulle Cedex (FR)

(54) Infrared occupant position detection system and method for a motor vehicle

(57) An improved IR occupant position detection system (10) that provides accurate and reliable classification and position information at a speed sufficient to timely inhibit or otherwise control deployment of occupant restraints. A two-dimensional array (40) of IR emitters (L) is selectively activated to periodically illuminate two or more predetermined viewing planes (26, 28, 30) in the vicinity of a passenger seating area, and the reflected IR energy is detected by a photo-sensitive receiver (24) and analyzed to detect the presence of an occupant, to classify the occupant, and to identify and dynamically track the position of the occupant's head/torso relative to predefined zones of the passenger compartment. Modulating the intensity of the emitted IR beams with a known carrier frequency, band-pass filtering the received signal, and synchronously detecting the filtered signal distinguishes the reflected IR energy from other signals picked up by the IR receiver (24). Additionally, a two stage adaptive control mechanism compensates for the variation in intensity of the reflected energy with distance between the emitter and the occupant. The emitter (40) is implemented with orthogonal anode and cathode power rails with individual IR LED elements (L) placed at each anode-cathode intersection. Optical dispersion within the package is greatly reduced by an opaque cover layer (64) that effectively forms a well for each LED element (L).

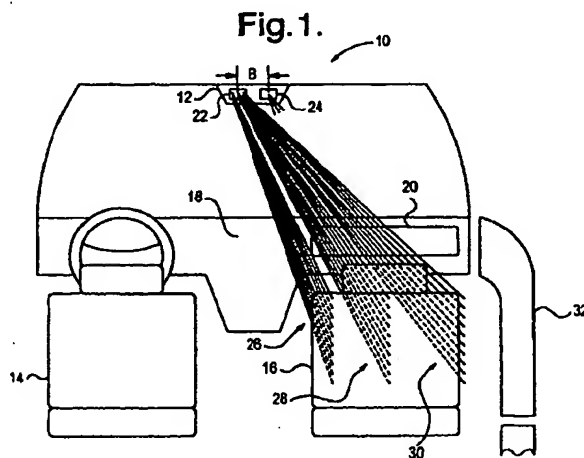

EP 1 033 290 A2

Description

Technical Field

[0001] This invention relates to a motor vehicle control system, and more particularly to a system and method for detecting the position of an occupant of the vehicle.

Background of the Invention

[0002] Vehicle occupant position detection systems are useful in connection with air bags and other pyrotechnically deployed restraints as a means of judging whether, and/or how forcefully, to deploy the restraint. Ideally, the system should be capable of classifying the type of occupant (i.e., large adult, small adult, child, etc.) and the position of the occupant relative to the point of deployment of the air bag. Various systems incorporating one or more infrared and/or acoustical ranging sensors have been proposed for this purpose; see, for example, the U.S. Patents 5,330,226 and 5,785,347. In general, such systems emit one or more beams of infrared energy to define a corresponding number of viewing fields, and receive the reflected energy to detect the presence of an occupant within the viewing fields. However, the information obtained by such techniques is sometimes corrupted by other light sources (such as reflected sunlight, or pulsed incandescent light), and even under best conditions is typically insufficient to accurately classify the occupant type and position. For example, it may be desired to deploy an air bag even though the occupant's hand or arm is near the point of deployment, but undesirable to deploy if the occupant's head or torso is near the point of deployment. For this reason, other position sensors or weight sensors are typically used in combination with a ranging sensor to provide a more comprehensive understanding of occupant classification and position. Unfortunately, such systems tend to be quite costly, and are difficult to package in the automotive environment. Moreover, a relatively high speed of response is required so that deployment can be properly inhibited or allowed when the occupant position quickly changes, possibly in anticipation of an impending collision. Accordingly, what is needed is a low-cost system that can accurately and quickly recognize an occupant for purposes of classification and position.

Summary of the Invention

[0003] The present invention is directed to an improved infrared (IR) occupant recognition system that is low in cost, and provides accurate and reliable classification and position information at a speed sufficient to timely inhibit or otherwise control deployment of occupant restraints. A two-dimensional array of IR emitters is selectively activated to periodically illuminate two or

more predetermined viewing planes in the vicinity of a passenger seating area, and the reflected IR energy is detected by a photo-sensitive receiver and analyzed to detect the presence of an occupant, to classify the occupant, and to determine the position of the occupant relative to predefined zones of the passenger compartment.

[0004] One aspect of the invention concerns a technique for reliably distinguishing the reflected IR energy from other signals picked up by the IR receiver. This involves modulating the intensity of the emitted IR beams with a known carrier frequency, band-pass filtering the received signal, and synchronously detecting the filtered signal.

[0005] Another aspect of the invention concerns a two stage adaptive control mechanism that compensates for the variation in intensity of the reflected energy. A first stage adaptively adjusts the gain of the receiver circuit, while a second stage adaptively adjusts the intensity of the emitted signal.

[0006] A further aspect of the invention concerns a novel mechanization of the two-dimensional emitter array which reduces manufacturing cost and package size, while retaining the flexibility of tailoring the dimensions of the array to suit a particular application. This is achieved through the use of orthogonal anode and cathode power rails with individual IR LED elements placed at each anode-cathode intersection. One of the anode and cathode terminals of each LED is mounted on its respective power rail, and the other is wire-bonded to its respective power rail. This eliminates interference between wire-bonds, reduces the number of driver circuits, and significantly shrinks the package size. Optical dispersion within the package is minimized by an opaque cover layer that effectively forms a deep cavity around each LED element.

[0007] A further aspect of the invention concerns a methodology for using the two-dimensional emitter array to recognize an occupant and quickly track any motion of the recognized occupant. This is achieved by identifying the emitter array positions corresponding to the torso of a recognized occupant, and scanning at least those positions at a rate much faster than the other positions.

Brief Description of the Drawings

[0008] The present invention will now be described, by way of example, with reference to the accompanying drawings, in which:-

Figure 1 is a diagram illustrating a portion of the passenger compartment of a motor vehicle equipped with an inflatable restraint and the IR occupant position and detection system of this invention.

Figure 2 is a diagram illustrating the range determination technique used by the system of Figure 1.

Figure 3 is a diagram of a two-dimensional IR LED emitter array used in the system of Figure 1.

Figure 4 is a cross-sectional view of the emitter array of Figure 3, taken along lines 4-4 of Figure 3.

Figure 5 is a block diagram of the system of Figure 1, including a programmed state-machine and microprocessor.

Figure 6 is a diagram of the functions performed by the state machine of Figure 5.

Figures 7-11 and 14 are flow diagrams representative of computer program instructions performed by the microprocessor of Figure 5. Figure 7 depicts a periodically executed background routine for setting up and enabling activation of a selected LED element. Figure 8 depicts an interrupt driven routine for reading the received signal and computing occupant range. Figure 9 depicts a portion of the flow diagram of Figure 7 pertaining to adjustment of a programmable gain parameter; and Figure 10 depicts a portion of the flow diagram of Figure 7 pertaining to adjustment of an activation current for the selected LED element. Figure 11 depicts a foreground routine for selectively enabling and disabling the inflatable restraint based on the occupant classification and range information; and Figure 14 depicts a portion of the foreground routine of Figure 11 pertaining to dynamic tracking of a recognized or classified occupant.

Figures 12 and 13 depict portions of the emitter array of Figures 3-4 in relation to the flow diagram of Figure 14.

Description of the Preferred Embodiment

[0009] Referring to the drawings, and particularly to Figure 1, the reference numeral 10 generally designates a vehicle occupant position detection system according to this invention. In the illustrated embodiment, the system 10 is mechanized as a single module, mounted in a ceiling console 12 between and above the driver and passenger seats 14, 16. Obviously, other locations for the system 10 are also possible, but the illustrated location is generally preferred because it is least intrusive, easy to package and centrally located for flexibility in sensing one or more of several occupant positions, if desired. Of course, the vehicle may have a bench-style seat instead of the illustrated bucket seats 14, 16; in any event, the normal occupant positions on the seat(s) are defined by the placement of the seat belts (not shown).

[0010] In general, the system 10 is described herein in the context of an otherwise conventional supplemental inflatable restraint system, including an air bag 20 installed in the instrument panel 18 forward of the passenger seat 16. The system 10 interacts with the restraint system by scanning the vicinity of the seat 16 where an occupant might be positioned, and producing a control signal to either inhibit or allow deployment of the air bag 20 in response to a crash event of sufficient

severity, based on the occupant classification, and/or the position of a recognized occupant relative to the air bag 20. The criteria concerning whether to enable or inhibit deployment are outside the scope of this invention, and are generally defined by the vehicle manufacturer or governmental regulation. It is generally agreed, however, that deployment of the air bag 20 should be disabled if the seat is unoccupied, or occupied by a front or rear facing infant seat, or by an out-of-position adult or small child, where the term out-of-position is defined by a predetermined proximity of the occupant's head or torso to the point of deployment of the air bag 20. Accordingly, the objective of the system 10 is to classify or recognize the various types of occupants (or the absence of an occupant), and to detect if an occupant is out-of position.

[0011] As indicated above, the information that can be gleaned from any given sensor type or location is generally inadequate to confidently classify an occupant and detect an out-of-position condition. However, the present invention overcomes the limitations of prior sensing systems through the use of a two-dimensional IR emitter 22 that is selectively activated to periodically illuminate multiple predetermined viewing planes in the vicinity of passenger seat 16, as shown in Figure 1. Individual LEDs of the emitter 22 are selectively activated to produce an IR beam whose direction is determined by the position of the LED in the array and the optical parameters of a lens system incorporated within emitter 22. As described in further detail below in respect to Figure 3, the constituent LEDs are arranged in a rectangular grid three columns wide and ten rows in length. The emitter 22 is positioned in the console 12 so that the IR beams emitted by the LEDs in the first, second and third columns of the emitter 22 are respectively directed along first, second and third planes identified generally by the reference numerals 26, 28 and 30 in Figure 1. The plane 26 includes the normal orientation of an occupant's left leg and torso when normally seated, the plane 28 includes the normal orientation of the occupant's right leg and torso, and the plane 30 includes the interior edge of the passenger door 32. In each plane, some of the beams are directed through an out-of-position (OOP) zone forward of the seat 16 and in proximity to the air bag 20, some are directed onto the seat 16 or door 32, and some are directed above the seat 16 and/or door 32. The IR energy reflected by the occupant or seat 16 or door 32 is detected by a photo-sensitive receiver 24 disposed a predetermined distance B from the emitter 22, and the range of the occupant from the emitter 22 is determined based on a pair of coordinate currents developed by the receiver 24, as described in further detail below in reference to Figures 2 and 5.

[0012] As best seen in Figure 2, the emitter 22 comprises an IR LED array 40 and a lens system comprising an aspheric element 42 for concentrating IR light emitted from the array 40, and a symmetrical convex lens 44

for focusing the light on a target T, which in the illustrated embodiment, represents the passenger seat 16 or an occupant thereof. As indicated above, the array 40 comprises a two-dimensional arrangement of selectively activated IR LEDs, and is described in detail below in reference to Figures 3-4. The receiver 24 comprises a photo-sensitive device (PSD) 46 and a lens system comprising an IR filter 48, an aspheric element 50 for imaging the received IR light, and a symmetrical convex lens 52 for focusing the imaged light on the PSD 46. The PSD 46 is a conventional two-dimensional element, and provides a pair of coordinant currents, referred to herein as i_x and i_y , corresponding to the centroid of the IR light impinging on the active surface of the device. The range of the target T from the emitter/receiver pair is determined by the location of the received IR light relative to the emitted light. In the illustration of Figure 2 where B is the distance between emitter 22 and receiver 24, f is the focal length of the lens 52, X is the location of the received light relative to the axis of the PSD 46, the range or distance D of the target T is expressed as $(f * B/x)$, where x can be determined by the ratio $(i_x - i_y)/(i_x + i_y)$. As described below, an important aspect of this invention involves properly selecting an illumination pattern and properly analyzing the received range information.

[0013] Figures 3 and 4 depict a particularly advantageous mechanization of the emitter array 40, in which individual IR LED elements L are arranged in a two-dimensional grid designated by "row" and "column" coordinate positions to form a three-by-ten array. Obviously, other array dimensions could be used as well. The horizontal "rows" are defined by the parallel cathode conductor segments C1-C10, while the vertical "columns" are defined by the parallel anode conductor segments A1-A3. For convenience, the portion of the array 40 between conductor segments C2 and C10 has been omitted from Figure 3, as indicated. Figure 4 depicts a cross-sectional view of the array through the center of cathode conductor segment C1, as indicated by the section lines 4-4 in Figure 3. The LED elements L are located at the intersections of the anode and cathode conductor segments A1-A3 and C1-C10, and are designated by their "row, column" coordinate position. For example, the LED element in the upper left corner of the array 40 is designated as L1,1 and the LED element in the opposite corner is designated as L10,3.

[0014] In the illustrated embodiment, the cathode conductor segments C1-C10 are formed on a substrate 60, and the anode conductor segments A1-A3 are then formed along with underlying segments 62 of insulation or dielectric material such that the segments 62 electrically isolate the anode and cathode segments at the intersections thereof. The anode terminal of each LED element L is mounted on the respective anode conductor segment A1-A3 and cathode terminal is wire bonded to the underlying cathode conductor segment C1-C10 in an area adjacent the anode conductor segment. A

cover layer 64 formed atop the conductor segments A1-A3, C1-C10, insulator 62 and substrate 60 is windowed to define a cavity or window W (each being designated by its row, column coordinate position) around each of the LED elements L. As indicated in Figure 4, the cover layer 64 is relatively thick compared to the conductor segments and LED elements L, thereby minimizing scattering of the IR light emitted by the LED elements L, and increasing the intensity of the focused light beams. In the illustrated embodiment, the substrate 60 is ceramic, and the conductor segments A1-A3, C1-C10, insulation segments 62 and cover layer 64 are formed using conventional thick film manufacturing processes, but obviously, a similar structure could be produced with different manufacturing processes. Other design variations are also possible; for example, the cathode conductor segments C1-C10 could be formed atop the anode conductor segments A1-A3, if desired.

[0015] The above-described array configuration and obvious variations thereof are particularly advantageous for a number of reasons, including improved light emission (spot quality) and significantly reduced package size, compared to conventional arrays and devices. The improved spot quality of the emitted light is achieved by the cover layer 64, as describe above. The use of a row-column selectable array significantly reduces the number of conductor terminals required for selective activation of individual LED elements, as well as the number of external driver circuits that interface with the array 40. Moreover, the wire bonds are very short in length and do not interfere with each other. Further, the anode conductor segments A1-A3 act as heat-sinks for the LED elements, reducing the size and complexity of auxiliary heatsinks that may be required. These factors enable the construction of a multi-element array in flexible configurations, and with a very small size that can easily be packaged behind a minimum diameter lens, resulting in a two-dimensional emitter that is economical to produce, that reduces system cost, and that can be easily packaged in an automotive or other space restricted environment.

[0016] Figure 5 is a block diagram of the vehicle occupant position detection system 10 of Figure 1. The system 10 comprises the emitter 22 and receiver 24, a receiver circuit 70 for extracting occupant range related signals from the i_x and i_y outputs of the PSD 46, a microprocessor (μP) 72 for receiving and analyzing the range signals, a transmitter circuit 74 for activating the IR LED array 40, and a State Machine 76 for coordinating the operation of the transmitter and receiver circuits 74, 70. In general, the microprocessor 72 selects a particular LED element (via Select line 78) and requests the State Machine 76 (via Request Line 80) to obtain the range signals for the selected LED. The State Machine responds by activating the selected LED element, controlling the receiver circuit 70 to synchronously detect and capture the received range signals, and signaling the microprocessor (via Acknowledge-

ment line 82) that the range signals are available at its A/D input port 84.

[0017] The selected LED element of array 40 is activated with a pulse of high frequency sinusoidal current to produce an intensity modulated IR light beam fitting into the pattern generally described above in reference to Figure 1. The frequency of the activation current is fixed by microprocessor 72 (via line 86) and its magnitude is controlled by the microprocessor 72 (via line 88) to compensate for variations in the reflected signal strength, as explained below. The decoder 90 receives the data on the microprocessor Select Line, and activates semiconductor switch elements in the anode and cathode driver circuits 92 and 94 corresponding to the column and row address of the selected LED element. The anode drive circuit couples the respective anode conductor segment A1-A3 of array 40 to a Programmable Current Source 96, which when enabled by State Machine 76 (via line 98), develops and outputs a sinusoidal drive current on line 100, at the frequency and amplitude dictated by microprocessor 72 (via lines 86, 88). The cathode drive circuit 94 couples the respective cathode conductor segment C1-C10 to the system common or ground.

[0018] When the IR light pulse thereby produced by the emitter 22 illuminates the passenger seat 16, an occupant, or the door 32, a reflected light pulse at the same frequency (intensity modulation) is returned to receiver 24, which produces the coordinate currents i_x and i_y on lines 102 and 104. Unfortunately, the components of the i_x and i_y signals corresponding solely to the reflected IR light pulse are buried in other signals (considered as noise to the system 10) arising from direct or reflected ambient light produced by sources both inside and outside the vehicle. However, the receiver circuit 70 is able to extract the i_x and i_y signal components corresponding to the reflected IR light pulse by converting i_x and i_y to voltage signals v_x , v_y with I/V conversion circuits 106, 108 and band-pass filtering the voltage signals v_x , v_y with the band-pass filter circuits 110, 112. This is possible because the components of the i_x and i_y signals corresponding to the reflected IR light pulse have a characteristic frequency corresponding to the intensity modulation frequency of the emitted IR light pulse. Thus, the band pass filters 110, 112 pass only the desired components of the v_x and v_y signals, and reject all other components as noise. In practice, the LED elements may be activated at a frequency of 20kHz - 50kHz, with the band pass filters 110, 112 tuned to distinguish signals of the emitted frequency from other light sources. The extracted v_x and v_y signals are then amplified, as also indicated at blocks 110 and 112, to form the signals v_x' and v_y' .

[0019] The extracted and amplified coordinate signal voltages v_x' and v_y' are then synchronously detected by the Peak Follower circuits 114, 116 and the Reset Circuit 118, which is activated by State Machine 76. The Peak Follower circuits 114, 116 generate output

voltages x_p and y_p that track peak instantaneous voltage of the respective signals v_x' and v_y' , and the State Machine 76 controls the operation of the Reset Circuit 118 (via line 120) so that the Peak Follower circuits 114, 116 are active only at the peak intensity points of the sinusoidal current waveform generated by the Programmable Current Source 96. The timing information is available to the State Machine 76 because the sinusoidal current has a fixed frequency (and duty cycle) and is triggered on and off by the State Machine 76. This provides further immunity from any noise component present in v_x' and v_y' signals. The peak signal outputs x_p and y_p are then amplified by Programmable Gain Amplifiers 122 and 124, providing amplified input voltages to sample-and-hold (S/H) circuits 126, 128. As explained below, the gains of blocks 122 and 124 are controlled by the microprocessor 72 (via lines 130 and 132) to compensate for variations due to the range of target T. The State Machine 76 triggers the S/H circuits 126, 128 (via lines 134 and 136) one or more times during each LED activation pulse, and the sampled signal values are provided as inputs to the respective Averaging circuits 138, 140, which in turn provide inputs x_{sig} , y_{sig} to the microprocessor A/D port 84. The Averaging circuits 138, 140 are required because the State Machine 76 triggers the S/H circuits 126, 128 two or more times in succession for improved accuracy, as described below in reference to Figure 6. In the illustrated embodiment, the microprocessor 72 determines the number of samples and signals the State Machine 76 accordingly via line 142.

[0020] As indicated above, the microprocessor 72 controls both the amplitude of the LED activation current and the gain of the Programmable Gain Amplifiers 122, 124 to compensate for variations in the strength of the reflected signal. The adjustments are important because the PSD output signals i_x and i_y may vary in amplitude by several orders of magnitude depending on range. As explained below in reference to Figure 9, the microprocessor 72 reads the averaged signals x_{sig} , y_{sig} applied to its A/D input port 84 and compares the signals to upper and lower thresholds UT1 and LT1 corresponding to a desired input signal range of A/D input port 84. If a signal x_{sig} or y_{sig} exceeds the upper threshold UT1, the gain of the respective Programmable Gain Amplifier 122 or 124 is decremented. Similarly, if a signal x_{sig} or y_{sig} is below the lower threshold LT1, the gain of the respective Programmable Gain Amplifier 122 or 124 is incremented. This adjustment serves to keep the input signals x_{sig} and y_{sig} within the desired input signal range of the A/D input port 84. Beyond the programmable gain adjustment, the microprocessor 72 also incrementally adjusts the amplitude of the LED activation current produced by Programmable Current Source 96. As explained below in reference to Figure 10, the activation current (beam current) is decremented to reduce the PSD output if either of the normalized range signals x_{nor} , y_{nor} exceeds an upper

threshold UT2. Similarly, the beam current is incremented to increase the PSD output if xnor or ynor are below a lower threshold LT2. This serves to limit the dynamic range requirements of the receiver circuit 70, significantly reducing the cost of its components.

[0021] The above-described functions of the State Machine 76 are illustrated in diagrammatic form in Figure 6. Referring to Figure 6, the State Machine functionality is depicted by as comprising eight principle states designated by blocks 150-164. In the quiescent or idle condition designated by block 150, the State Machine is inactive, and waiting for an LED activation request from microprocessor 72 (via Request line 80). In response to an activation request, the State Machine progresses to block 152 and activates the Programmable Current Source 96 (via line 98) to pulse the LED element selected by the microprocessor 72. Then in succession at blocks 154 and 156, the Peak Follower circuits 114, 116 are enabled to track the peaks of the signals vx', vy' in synchronism with the peak values of the LED activation current, and the S/H circuits 126, 128 are signaled to latch the sampled input signals. If the microprocessor has requested only one sample, the State Machine 76 then proceeds to block 164, and deactivates the selected LED element, disables the Peak Follower circuits 114, 116, and issues an acknowledgement signal to microprocessor 72 (via line 82), indicating that the range signals xsig and ysig are available at the A/D port 84. Alternatively, if the microprocessor 72 has requested the State Machine to obtain and average two samples, the State Machine advances to the block 158 where the S/H circuits 126, 128 are commanded to latch a second sample before advancing to block 164. Or if the microprocessor 72 has requested the State Machine to obtain and average four samples, the State Machine additionally advances to the blocks 160 and 162 where the S/H circuits 126, 128 are commanded to latch third and fourth samples before advancing to block 164. In any event, the Averaging circuits 138, 140 automatically average the samples and the microprocessor 72 only reads the value after receiving the State Machine's acknowledgement signal at block 164. In practice, State Machine 76 may be implemented with a standard programmable logic array device, and significantly reduces the processing burden of the microprocessor 72, which is primarily concerned with analyzing the range information to determine if air bag deployment should be enabled or disabled based on occupant classification and/or position.

[0022] The flow diagrams of Figures 7-10 represent computer program instructions executed by the microprocessor 72 in carrying out the functions attributed to microprocessor 72 in the above discussion of Figure 5. Figure 7 is a routine executed periodically (that is, based on a timer interrupt) to set up and request activation of a selected LED element L. In response to the interrupt 170, the blocks 172-178 are executed in sequence to determine the selected LED element from

a table created by the foreground routine of Figures 11 and 14, to adjust the gains of Programmable Gain Amplifiers 122, 124, to adjust the activation current of the selected LED, and to issue a request signal to State Machine 76 via Request line 80. The block 174 is detailed in the flow diagram of Figure 9, and the block 176 is detailed in the flow diagram of Figure 10.

[0023] Figure 8 is a routine executed each time the State Machine signals via line 82 that the range signals are ready for access. In practice, the acknowledgement signal from State Machine 76 triggers an interrupt 180, and in response, the microprocessor sequentially executes the blocks 182-188, as indicated. This involves reading the inputs xsig, ysig, adjusting their values for DC offsets, normalizing the adjusted values to account for the commanded amplitude of the activation current, and computing and storing the target range. As indicated above, the target range D is determined in accordance with the expression $f * B/x$, where x can be determined according to the expression $(xnor - ynor)/(xnor + ynor)$, where xnor and ynor are the normalized range signals.

[0024] Referring to the flow diagram of Figure 9, the programmable gain adjustment of block 174 in Figure 7 involves comparing the input signals xsig and ysig to predetermined upper and lower thresholds UT1 and LT1. If xsig is less than LT1, as determined at block 190, the block 192 is executed to increment the gain of Programmable Gain Amplifier 122. Similarly, if xsig is greater than UT1, as determined at block 194, the block 196 is executed to decrement the gain of Programmable Gain Amplifier 122. In a similar manner, the blocks 198-204 are then executed to increment the gain of Programmable Gain Amplifier 124 if ysig is less than LT1, and to decrement the gain of Programmable Gain Amplifier 124 if ysig is greater than UT1.

[0025] Referring to the flow diagram of Figure 10, the LED activation current adjustment of block 176 of Figure 7 involves comparing the normalized input signals xnor and ynor to predetermined upper and lower thresholds UT2 and LT2. If xnor or ynor is greater than UT2, as determined at block 210, the block 212 is executed to reduce or decrement the requested beam (LED activation) current. If xnor or ynor is less than LT2, as determined at block 214, the block 216 is executed to increment the requested beam (LED activation) current.

[0026] The flow diagram of Figure 11 represents an executive or foreground software routine executed by the microprocessor 72 for analyzing the range data as it is received in order to classify and track an occupant of passenger seat 16 for the purpose of deciding whether to enable or disable deployment of the air bag 20. The block 220 designates a series of initialization instructions executed at the commencement of each period of vehicle operation for initializing various parameters and stored values to predetermined settings. Part of the initialization process, for example, may involve disabling deployment of the air bag 20 until classification can be

resolved, and executing certain diagnostic or self-check routines. Also, various timer values and timer interrupt sequences are initialized, such as the timer interrupt discussed in reference to Figure 7 for requesting occupant range data. Following initialization, the block 222 is executed to determine, based on the currently available occupant range data, whether the passenger seat 16 is occupied by a forward facing infant seat (FFIS), a rear facing infant seat (RFIS), a small child, or an adult, or if the seat is simply unoccupied. The software routines of block 222 contain a set of rules to which the range data of array 40 is applied for discriminating between the various occupant classifications. The rules are developed empirically by gathering libraries of data representative of different occupants, seating positions, clothing, etc., and using signal processing techniques to develop rules that identify range data characteristic of a particular occupant classification. Once the classification has been determined, and verified as explained below, the determination is "locked in" unless a major shift in range data occurs; for example, a change in occupants.

[0027] If the classification rules indicate that the passenger seat is unoccupied, the blocks 232 and 246 are executed to indicate an "empty seat" classification, and to perform secondary testing designed to either increase or decrease the confidence in the indicated classification. The tests of block 246 tend to be heuristic in nature, and may involve for example, monitoring for lack of movement in the scanned area. If the secondary testing tends to verify the indicated classification, as determined at block 248, the classification is locked-in, and the block 250 is executed to disable deployment of the air bag 20. Similarly, if the classification rules of block 222 indicate that the passenger seat is occupied by a forward facing infant seat, the blocks 230 and 240 are executed to indicate a "FFIS" classification, and to perform secondary testing designed to either increase or decrease the confidence in the indicated classification. In this case, the secondary testing may involve for example, monitoring for a limited movement in the central portion of the scanned area. If the secondary testing tends to verify the indicated classification, as determined at block 242, the classification is locked-in, and the block 244 is executed to disable deployment of the air bag 20. Similarly, if the classification rules of block 222 indicate that the passenger seat is occupied by a rear facing infant seat, the blocks 228 and 234 are executed to indicate a "RFIS" classification, and to perform secondary testing designed to either increase or decrease the confidence in the indicated classification. As with the FFIS, the secondary testing may involve for example, monitoring for a limited movement in the central portion of the scanned area. If the secondary testing tends to verify the indicated classification, as determined at block 236, the classification is locked-in, and the block 238 is executed to disable deployment of the air bag 20.

[0028] If the classification rules of block 222 indi-

cate that the passenger seat is occupied by a small child, the blocks 226 and 254 are executed to indicate a "small child" condition, and to perform tracking and out-of-position (OOP) testing, as described below. Similarly, if the classification rules of block 222 indicate that the passenger seat is occupied by an adult, the blocks 224 and 252 are executed to indicate an "adult" condition, and to perform tracking and out-of-position (OOP) testing. The tracking and OOP testing are described below in reference to Figures 12-14 in a manner that is generic to both the adult and small child classifications. The primary difference is that the OOP thresholds are separately specified for each occupant classification.

[0029] In general, the tracking function involves identifying the head/torso portion of the imaged occupant based on range, forming a grouping of IR beam positions corresponding thereto, and updating the range of those beam positions at a very fast rate so that the position of the head/torso can be tracked relative to a predefined OOP threshold - i.e., a predefined distance from the point of deployment of the air bag 20. In the illustrated embodiment, the grouping of IR beams comprises a "cone" of five contiguous emitter array positions most closely associated with the identified head/torso position, and a "halo" of four emitter array positions surrounding the "cone". This concept is illustrated in Figures 12-13. Figure 12 depicts the emitter array 40 as a series of contiguous squares identified by the row, column locations discussed above in respect to Figure 3. Thus, the beam position 1/1 corresponds to the LED L1,1, and so on, with the beam positions of row one (positions 1/1, 1/2 and 1/3) illuminating the viewing area closest to the air bag 20. An example of a cone for an in-position occupant is shown by the shaded positions (5/2, 6/1, 6/2, 6/3 and 7/2), and the OOP threshold; for an adult for example, is represented by the broken line 256, the recognized occupant being considered in-position (IP) if the "cone" beams are below the threshold (i.e., in row three and higher), and out-of-position (OOP) if at least one of the "cone" beams crosses the threshold. The "halo" positions for the example "cone" are the surrounding beam positions 5/1, 5/3, 7/1 and 7/3. The halo positions are not used to enable or disable deployment, per se, but simply define a region surrounding and in proximity to the cone grouping for improved tracking.

[0030] In the illustrated embodiment, the system 10 is mounted in an overhead console as described in reference to Figure 1, and the center beam position (i.e., in column two of the array) of the row having the shortest range from system 10 is used to form the center of the cone. For example, if it has been determined that an adult or small child is occupying the passenger seat 16, and a comparison of the range data obtained from a complete scan of the viewing area as illustrated in Figure 1 reveals that the minimum range corresponds to the LED beam position 6/1, the microprocessor 72 selects the center beam position in row six (i.e., position

6/2) as the center of the cone, and constructs the remainder of the cone and halo as shown in Figure 12. This is shown more clearly in Figure 13, where the cone is seen as comprising the center beam position (CRB) and the contiguous positions C1, C2, C3 and C4, and the halo comprises the surrounding positions H1, H2, H3 and H4.

[0031] Figure 14 depicts the tracking and OOP block 252 of Figure 11 in more detail. Initially, blocks 260-264 are executed to identify the minimum range position of the array 40, to determine the center row position associated with the identified minimum range position, and to build a cone/halo table based on that center row position. This will be recognized as the process described above in reference to Figures 12-13. The cone/halo table is simply a table that lists the emitter array positions (beam positions) that form the cone and the halo of the IR beam grouping centered on the head/torso of the recognized adult or small child passenger. Once the table has been created, the block 266 is executed to update a "beam request table" that indicates the relative priority of the various beam positions, with beam positions having a higher priority being scanned more frequently than beam positions of lower priority. In the illustrated embodiment, there are three different priorities: low, medium and high. The cone positions identified at block 264 are stored in the high priority list of the beam request table, and are scanned more frequently than any of the other beam positions. The halo positions identified at block 264 are stored in the medium priority list of the beam request table, and are scanned more frequently than non-cone and non-halo positions, but less frequently than the cone positions. When the interrupt service routine block 172 of Figure 7 is executed in response to the timer interrupt, the microprocessor 72 reads the beam request table, and decides which LED element to activate accordingly. By way of example, the microprocessor 72 can scan the halo positions several times as often as the normal priority positions, and the cone positions several times as often as the halo positions. Scanning the cone and halo beam positions at a high rate improves the ability of the system 10 to dynamically track a moving head/torso since the head/torso is identified by range, and most critical range information is updated at a very fast rate.

[0032] The block 268 is then executed to verify that the IR grouping is tracking the occupant's head/torso, as opposed to a hand or newspaper, for example. This is achieved by determining the difference in range between adjacent cone positions, and distinguishes an occupant's head/torso from an outstretched arm, for example. If the head/torso is verified, the blocks 270-274 are executed to enable or disable deployment of the air bag 20 based on a comparison of the IR beam grouping relative to the OOP threshold. If any cone position of the IR beam grouping has crossed the OOP threshold, block 272 disables deployment, and if no cones have crossed the OOP threshold, block 274 ena-

bles deployment. If a head/torso is not verified, deployment of the air bag 20 is enabled. In a preferred embodiment, the block 270 also keeps track of the rate of change in position of the IR beam grouping so that movement of a cone into the OOP zone can be anticipated prior to actual crossing of the OOP threshold.

[0033] In summary, the present invention provides a reliable, easily packaged, and cost efficient occupant recognition and position detection system for motor vehicle applications. As pointed out above, the illustrated embodiment is intended to be exemplary in nature, and it is expected that various modifications will occur to those skilled in the art. As such, it will also be understood, that systems incorporating such modifications may fall within the scope of this invention, which is defined by the appended claims.

Claims

1. A system (10) for detecting the position of an occupant of a motor vehicle including an IR transmitter (22) for emitting a beam of IR light for reflection off the occupant, an IR receiver (24, 70) for receiving the reflected IR light and developing an occupant range related input signal therefrom, and a controller (72, 76, 118) coupled to said IR transmitter and IR receiver for determining the position of the occupant relative to a predefined zone of the vehicle, the improvement wherein:

the IR transmitter (22) includes an IR light emitting diode (40) for emitting said beam of IR light, and a current source (96) effective when enabled to activate said light emitting diode (40) with a sinusoidal current of predetermined frequency so that the emitted beam of IR light has an intensity that is modulated at said predetermined frequency;

the IR receiver (24, 70) includes a photo-sensitive device (46) that generates a current signal having an occupant range related component at said predetermined frequency corresponding to an angle of reflection of said reflected IR light, and a band-pass filter (110, 112) for extracting said occupant range related component from said current signal to form said occupant range related input signal.

2. The improvement of Claim 1, wherein:

the IR receiver (24, 70) includes a peak following circuit (114, 116) for tracking an instantaneous value of said occupant range related input signal when enabled by said controller (72, 76, 118); and

the controller (72, 76, 118) includes means (76, 118) for enabling said peak following circuit (114, 116) so as to detect peak values of said

occupant range related input signal in synchronism with peak values of said sinusoidal current.

3. The improvement of Claim 1, wherein said photo-sensitive device (46) generates first and second current signals, each having an occupant range related component at said predetermined frequency, and said IR receiver (24, 70) includes first and second band-pass filters (110, 112) for coupled to said first and second current signals for respectively extracting first and second occupant range related components therefrom to form first and second range related input signals.

4. The improvement of Claim 3, wherein

the IR receiver (24, 70) includes first and second peak following circuits (114, 116) for tracking instantaneous values of said first and second range related input signals when enabled by said controller (72, 76, 118); and the controller (72, 76, 118) includes means (76, 118) for enabling said first and second peak following circuits (114, 116) so as to detect peak values of said first and second range related input signals in synchronism with peak values of said sinusoidal current.

5. A system (10) for detecting the position of an occupant of a motor vehicle including an IR transmitter (22) for emitting a beam of IR light for reflection off the occupant, an IR receiver (24, 70) for receiving the reflected IR light and developing an occupant range related input signal therefrom, and a controller (72, 76, 118) coupled to said IR transmitter (22) and IR receiver (24, 70) for determining the position of the occupant relative to a predefined zone of the vehicle, the improvement wherein:

the IR receiver (24, 70) includes a photo-sensitive device (46) that generates a current signal having an occupant range related component corresponding to an angle of reflection of said reflected IR light, a circuit (70) for extracting such component from said current signal, and a programmable gain amplifier (122, 124) for amplifying the extracted component to form said occupant range related input signal; and the controller (72, 76, 118) receives the occupant range related input signal at an input port thereof, and adjusts the gain of said programmable gain amplifier (122, 124) based on a magnitude of the received occupant range related input signal so as to drive the magnitude of subsequently developed occupant range related input signal into a desired input range of said input port.

6. The improvement of Claim 5, wherein:

the controller (72, 76, 118) includes a micro-processor (72), and the input port is an analog-to-digital input port of the microprocessor (72).

7. The improvement of Claim 5, wherein:

the controller (72, 76, 118) increases the gain of the programmable gain amplifier (122, 124) if the received occupant range related input signal is lower than said desired input range, and decreases the gain of the programmable gain amplifier (122, 124) if the received occupant range related input signal is higher than said desired input range.

8. The improvement of Claim 5, wherein:

said photo-sensitive device (46) generates first and second current signals, each having an occupant range related component at said predetermined frequency, and said IR receiver includes first and second circuits 106, 110, 114; 108, 112, 116) for respectively extracting the first and second components from said first and second current signal, and first and second programmable gain amplifiers (122, 124) for amplifying the extracted first and second component to form first and second occupant range related input signals; and said controller (72, 76, 118) receives the first and second occupant range related input signals at said input port, and individually adjusts the gain of said first and second programmable gain amplifiers (122, 124) based on respective magnitudes of the received first and second occupant range related input signals so as to drive the magnitudes of subsequently developed occupant range related input signals into a desired input range of said input port.

9. A system (10) for detecting the position of an occupant of a motor vehicle including an IR transmitter (22) for emitting a beam of IR light for reflection off the occupant, an IR receiver (24) for receiving the reflected IR light and developing first and second occupant range related input signals therefrom, and a controller (72, 76, 118) coupled to said IR transmitter (22) and IR receiver (24, 70) for determining the position of the occupant relative to a predefined zone of the vehicle, the improvement wherein:

the IR receiver (24, 70) includes a photo-sensitive device (46) that produces first and second currents used to develop said first and second occupant range related input signals; the IR transmitter (22) includes an IR light emit-

ting diode (40) for emitting said beam of IR light, and a current source (96) effective when enabled to activate said light emitting diode (40) with an activation current having a selectable magnitude, the first and second currents produced by said photo-sensitive device of said IR receiver (24) having magnitudes that vary in relation to the selected magnitude of said sinusoidal current; and

the controller (72, 76, 118) receives the first and second occupant range related input signals, determines a range of the occupant based on a ratio of such received first and second input signals, and selects the magnitude of said current source (96) based on a magnitude of the received first and second input signals so as to limit a range in magnitude of the first and second currents subsequently developed by said photo-sensitive device (46).

10. The improvement of Claim 9, wherein:

the controller (72, 76, 118) selects an increased magnitude of said current source (96) if the received first or second input signals are lower than a first predetermined threshold, and selects a decreased magnitude of said current source (96) if the received first or second input signals are higher than a second predetermined threshold, said first and second predetermined thresholds corresponding to a desired range in variation of said first and second currents.

11. A system (10) for detecting the position of an occupant of a motor vehicle including an IR transmitter (22, 74) for emitting a beam of IR light for reflection off the occupant, an IR receiver (24, 70) for receiving the reflected IR light and developing an occupant range related input signal therefrom, and a controller (72, 76, 118) coupled to said IR transmitter (22, 74) and IR receiver (24) for determining the position of the occupant relative to a predefined zone of the vehicle, the improvement wherein:

the IR transmitter (22, 74) includes an array of IR light emitters (40) that are individually and selectively activated to emit a beam of IR light corresponding to a position of the activated IR light emitter in said array;

the controller (72, 76, 118) includes:

a microprocessor (72) for requesting activation of a selected IR light emitter (40), receiving the occupant range related input signal corresponding to the selected IR light emitter (40), and determining the occupant position based on a plurality of

received occupant range related input signals; and

a state machine (76) that operates in response to a requested activation of a selected IR light emitter (40) to enable activation of the selected IR light emitter (40) by the IR transmitter (22, 74) and reception of the reflected IR light by the IR receiver (24, 70), and to signal the microprocessor (72) that the an occupant range related input signal corresponding to the selected IR light emitter (40) is ready to be received.

12. The improvement of Claim 11, wherein:

the IR transmitter (22, 74) activates the selected IR light emitter (40) so as to modulate the an intensity of the emitted beam of IR light at a predetermined frequency;

the IR receiver (24, 70) includes a sensor (46) and circuit (106, 108, 110, 112) for producing a range related oscillatory signal at said predetermined frequency, and a detection circuit (114, 116) for detecting an instantaneous value of said oscillatory signal to form said occupant range related input signal; and

the state machine (76, 118) enables said detection circuit (114, 116) to detect the value of said oscillatory signal in synchronism with the modulation of emitted beam of IR light.

13. The improvement of Claim 11, wherein:

the IR receiver (24, 70) develops a range related signal, and includes a sampling circuit (126, 128) effective when enabled to sample and average one or more values of said range related signal;

the microprocessor (72) determines a specified number of times that said range related signal should be sampled; and

the state machine (76) enables said sampling circuit (126, 128) said specified number of times before signaling the microprocessor (72) that the an occupant range related input signal corresponding to the selected IR light emitter (40) is ready to be received.

14. A system (10) for detecting the position of an occupant of a motor vehicle including an IR transmitter (22, 74) for emitting a beam of IR light for reflection off the occupant, an IR receiver (24, 70) for receiving the reflected IR light and developing an occupant range related input signal therefrom, and a controller (72, 76) coupled to said IR transmitter (22, 74) and IR receiver (24, 70) for determining the position of the occupant relative to a predefined zone of the vehicle, the improvement wherein:

the IR transmitter (22, 70) includes a two-dimensional array (40) of IR light emitting diodes (L) that are individually and selectively activated to emit a beam of IR light corresponding to a position of the activated IR light emitting diode (L) in said array (40), said array (40) including a first plurality of parallel conductor segments (A1-A3) defining columns of said array (40) and a second plurality of parallel conductor segments (C1-C10) oriented perpendicular to said first plurality of segments (A1-A3) and defining rows of said array (40), each of said IR light emitting diodes (L) being positioned at a unique intersection of a row and column of said array (40), and activated when the conductor segments defining such row and column are coupled to a current source (96).

15. The improvement of Claim 14, wherein:

each of the IR light emitting diodes (L) has a first terminal mounted on a column conductor segment (A1-A3), and a second terminal that is wire-bonded to a row conductor segment (C1-C10) adjacent said column conductor segment A1-A3).

16. The improvement of Claim 14, wherein:

said array (40) includes a plurality of insulator segments (62) disposed between said first and second plurality of conductor segments (A1-A3, C1-C10) at least at the intersections thereof so as to electrically isolate said first and second plurality of conductor segments (A1-A3, C1-C10).

17. The improvement of Claim 14, wherein:

the array includes a cover layer (64) of opaque material substantially covering said first and second pluralities of conductor segments (A1-A3, C1-C10) except in proximity to the row and column intersections of said array (40), thereby defining cavities in which said IR light emitting diodes (L) are positioned.

18. The improvement of Claim 17, wherein said cover layer (64) has a thickness sufficient to substantially prevent dispersion of IR light emitted by said IR light emitting diodes (L).

19. A system (10) for detecting the position of an occupant of a motor vehicle including an IR transmitter (22, 74) for emitting a beam of IR light for reflection off the occupant, an IR receiver (24, 70) for receiving the reflected IR light and developing an occupant range related input signal therefrom, and a

controller (72, 76) coupled to said IR transmitter (22, 74) and IR receiver (24, 70) for determining the position of the occupant relative to a predefined zone of the vehicle, the improvement wherein:

the IR transmitter (22, 74) includes a two-dimensional array (40) of IR light emitters (L) that are individually and selectively activated to emit a beam of IR light corresponding to a position of the activated IR light emitter (L) in said array (40);

the controller (72, 76) selectively and repeatedly activates each of the IR light emitters (L) in a determined sequence and receives corresponding input signals to identify an emitter array position corresponding to a beam of IR light illuminating a head/torso of the occupant, and to indicate when the identified emitter array position corresponds to a beam of emitted light passing through said predefined zone.

20. The improvement of Claim 19, wherein:

the array (40) is mounted on a portion of said vehicle which is higher than the occupant; and the array position corresponding to a minimum detected occupant range is identified as the position that illuminates the head/torso of the occupant.

21. The improvement of Claim 19, wherein:

the controller (72, 76) forms a grouping of array positions contiguous with said identified position, and indicates when any position in the grouping corresponds to a beam of emitted light passing through said predefined zone.

22. The improvement of Claim 21, wherein:

the controller (72, 76) compares range information corresponding to the contiguous positions of said grouping, and confirms that said positions correspond to beams of IR light illuminating the head/torso of the occupant when a variation of said compared range information is less than a predetermined amount.

23. The improvement of Claim 19, wherein:

the controller (72, 76) activates the IR light emitter (L) corresponding to the identified position of said array (40) at a repetition rate that is higher than for other positions of said array (40).

24. The improvement of Claim 21, wherein:

the controller (72, 76) activates the IR light emitters (L) corresponding to the grouping of positions of said array (40) at a repetition rate that is higher than for other positions of said array (40).

5

10

15

20

25

30

35

40

45

50

55

Fig.1.

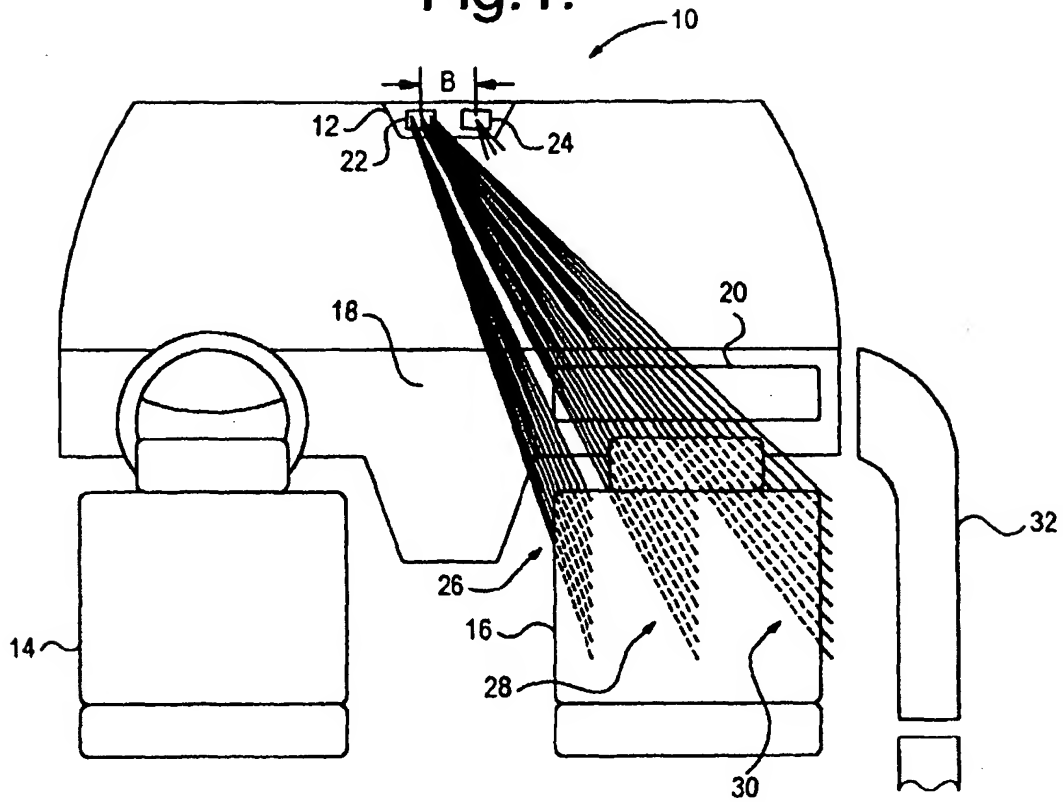


Fig.2.

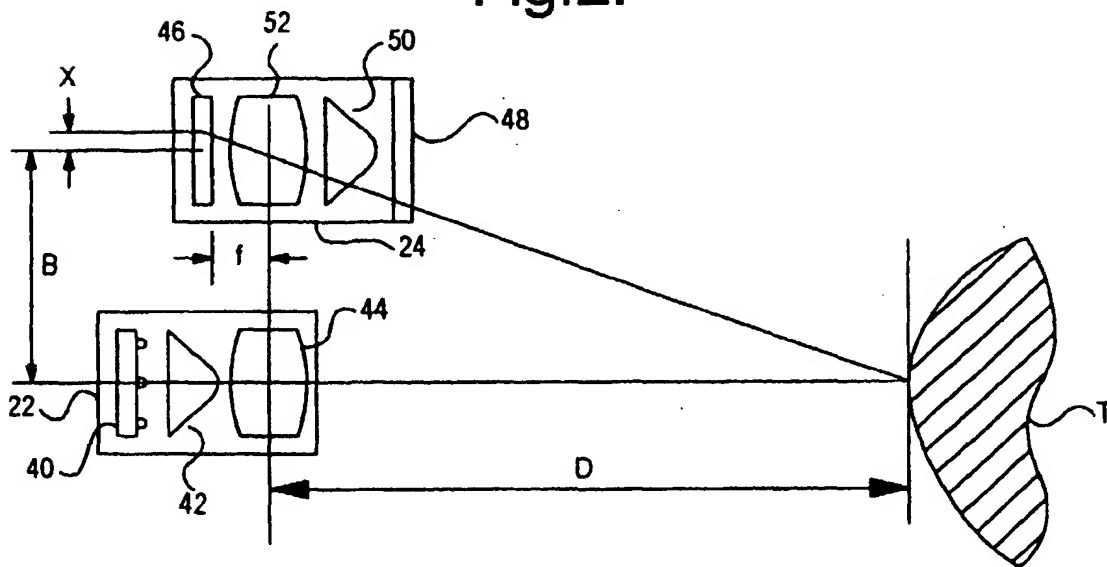


Fig.3.

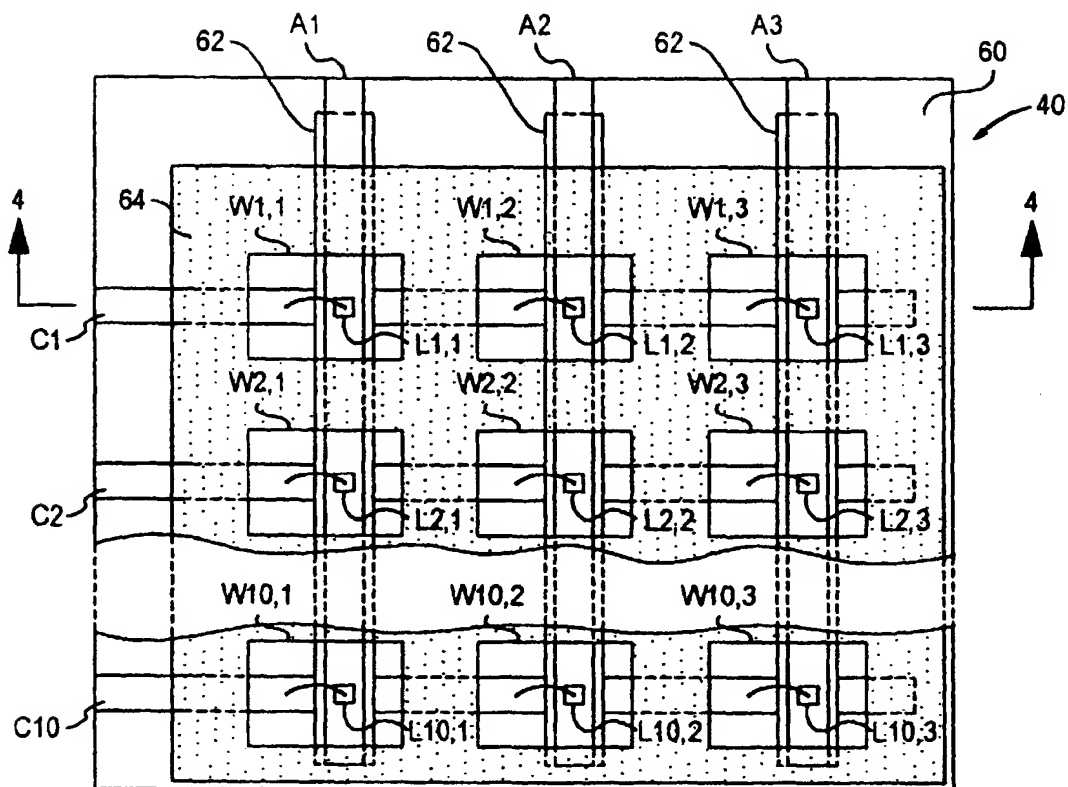


Fig.4.

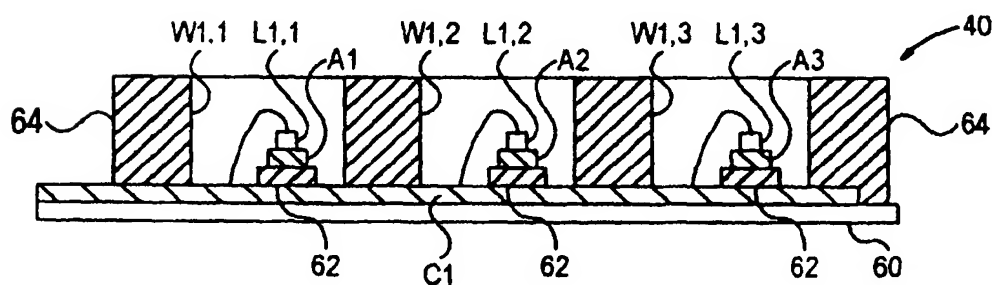


Fig. 5.

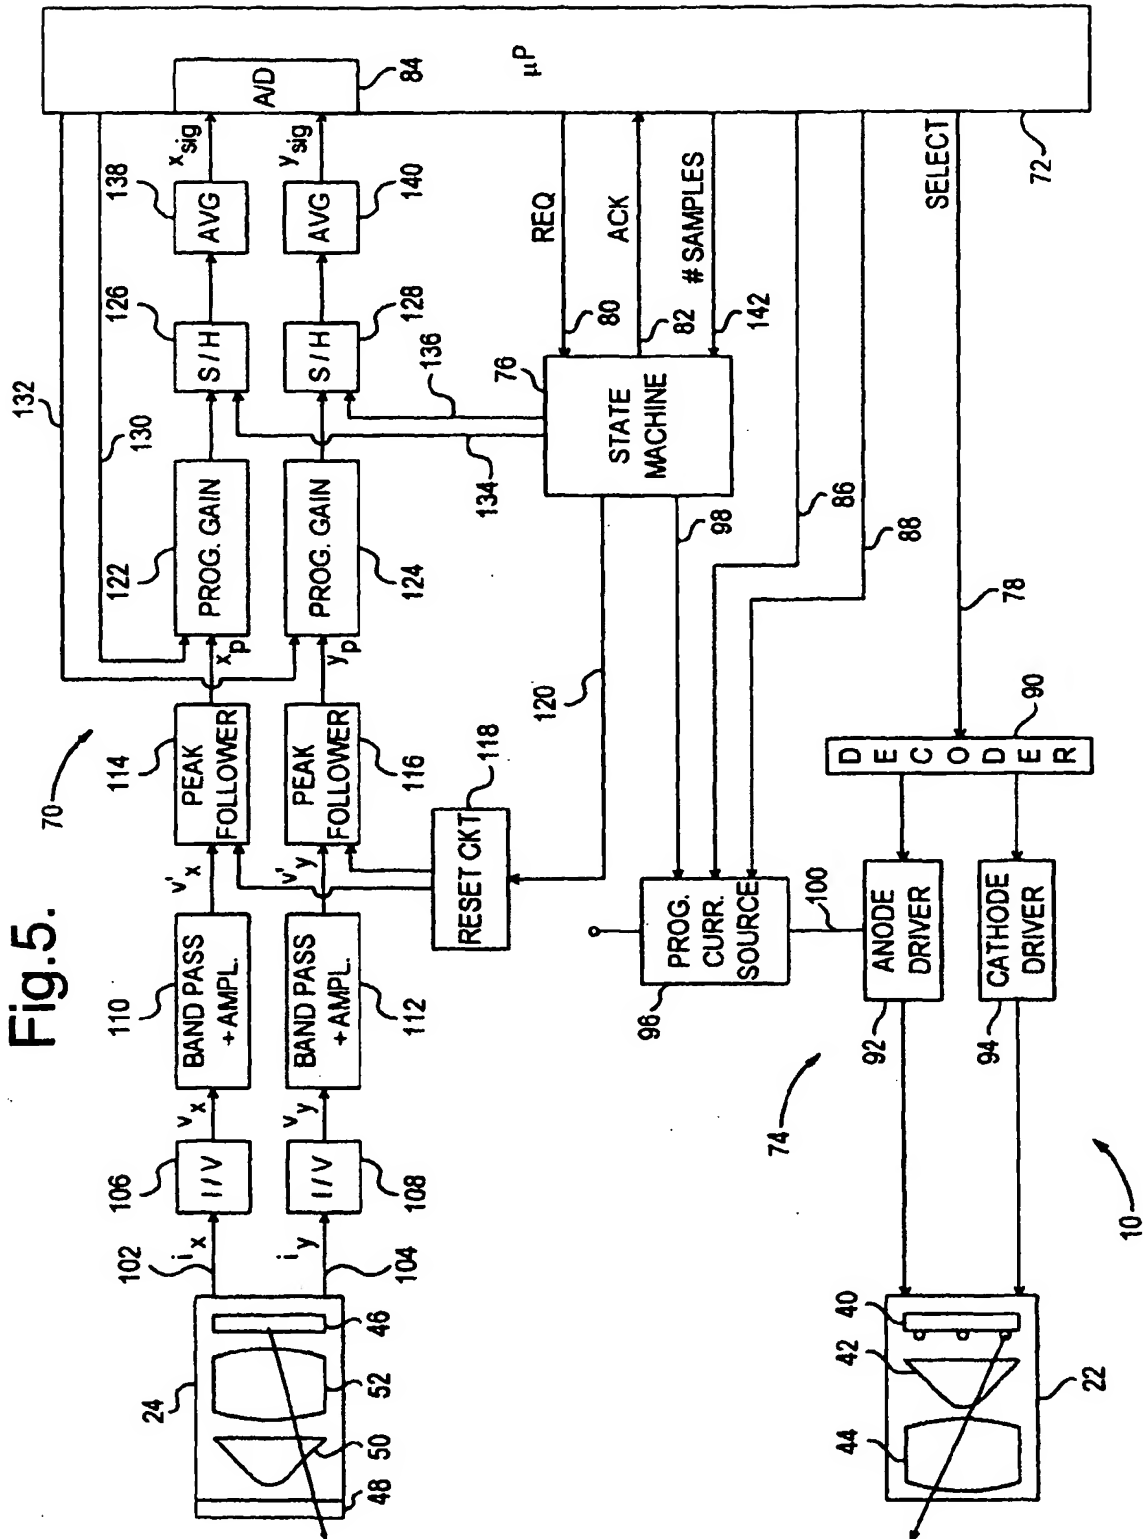


Fig.6.

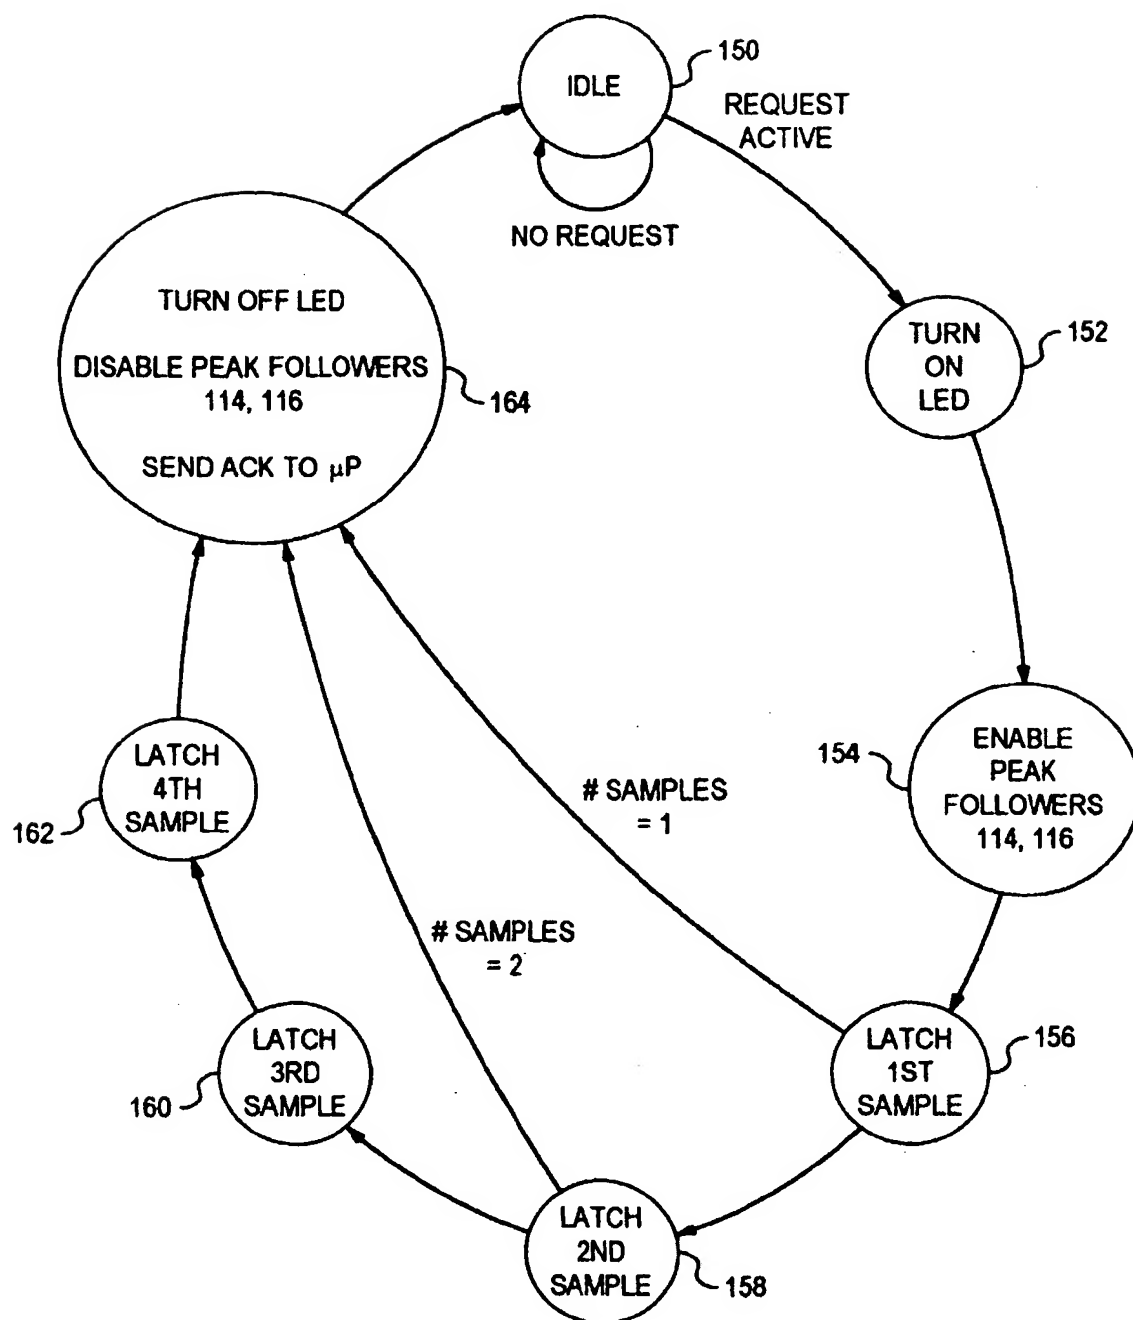


Fig.7.

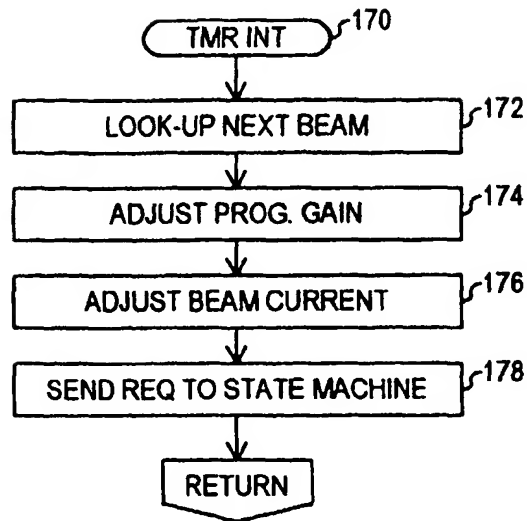


Fig.8.

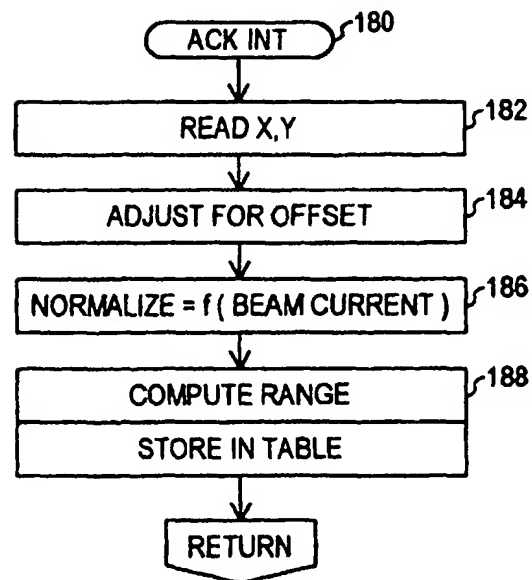


Fig.9.

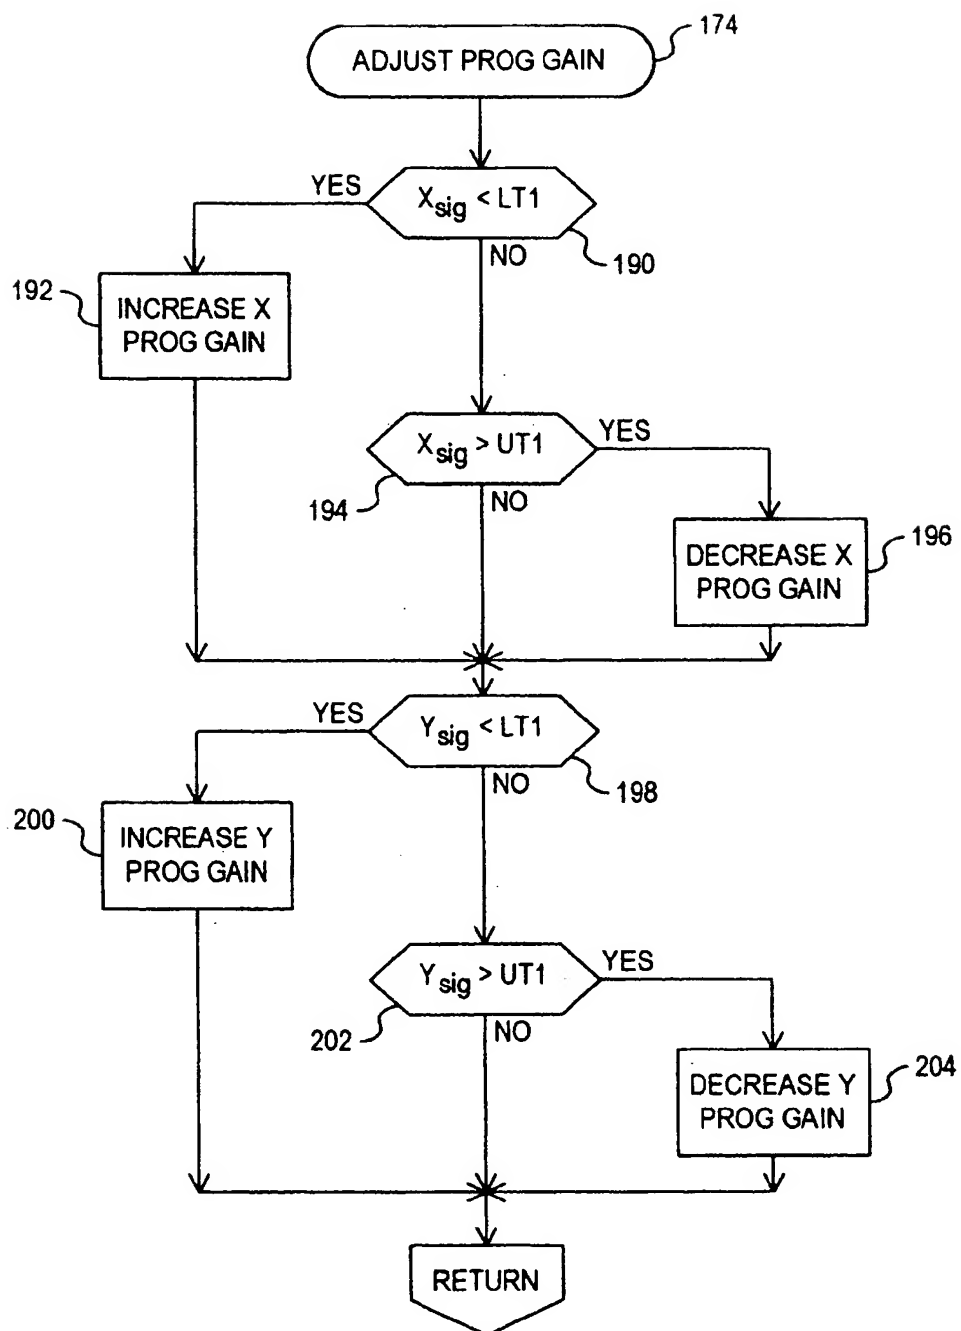


Fig.10.

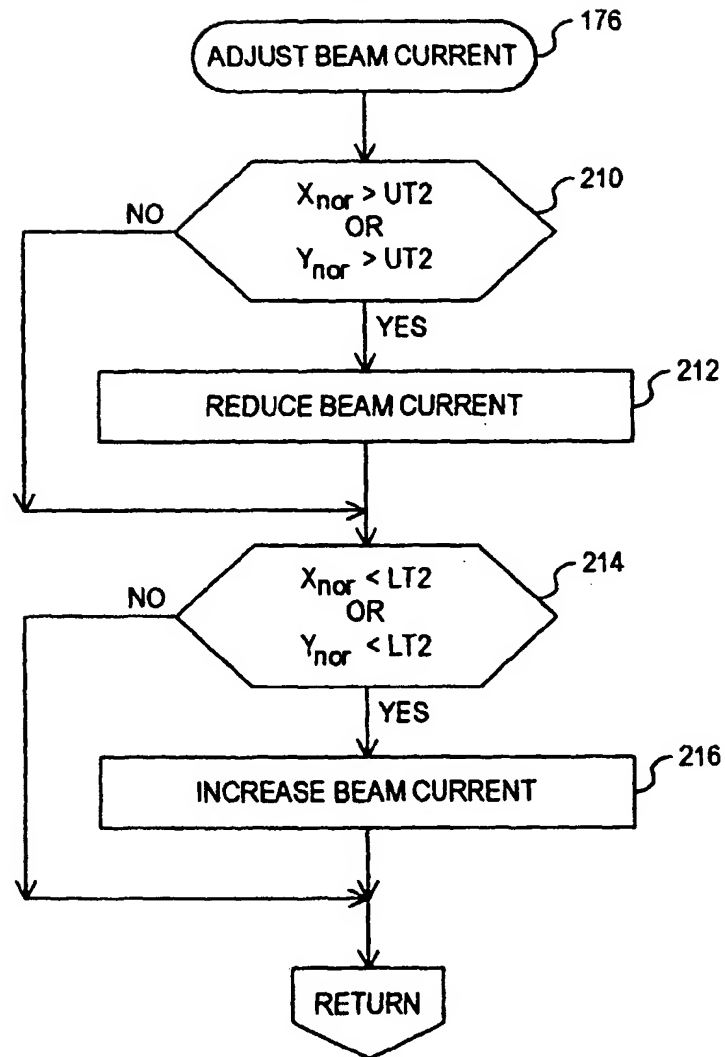


Fig.11.

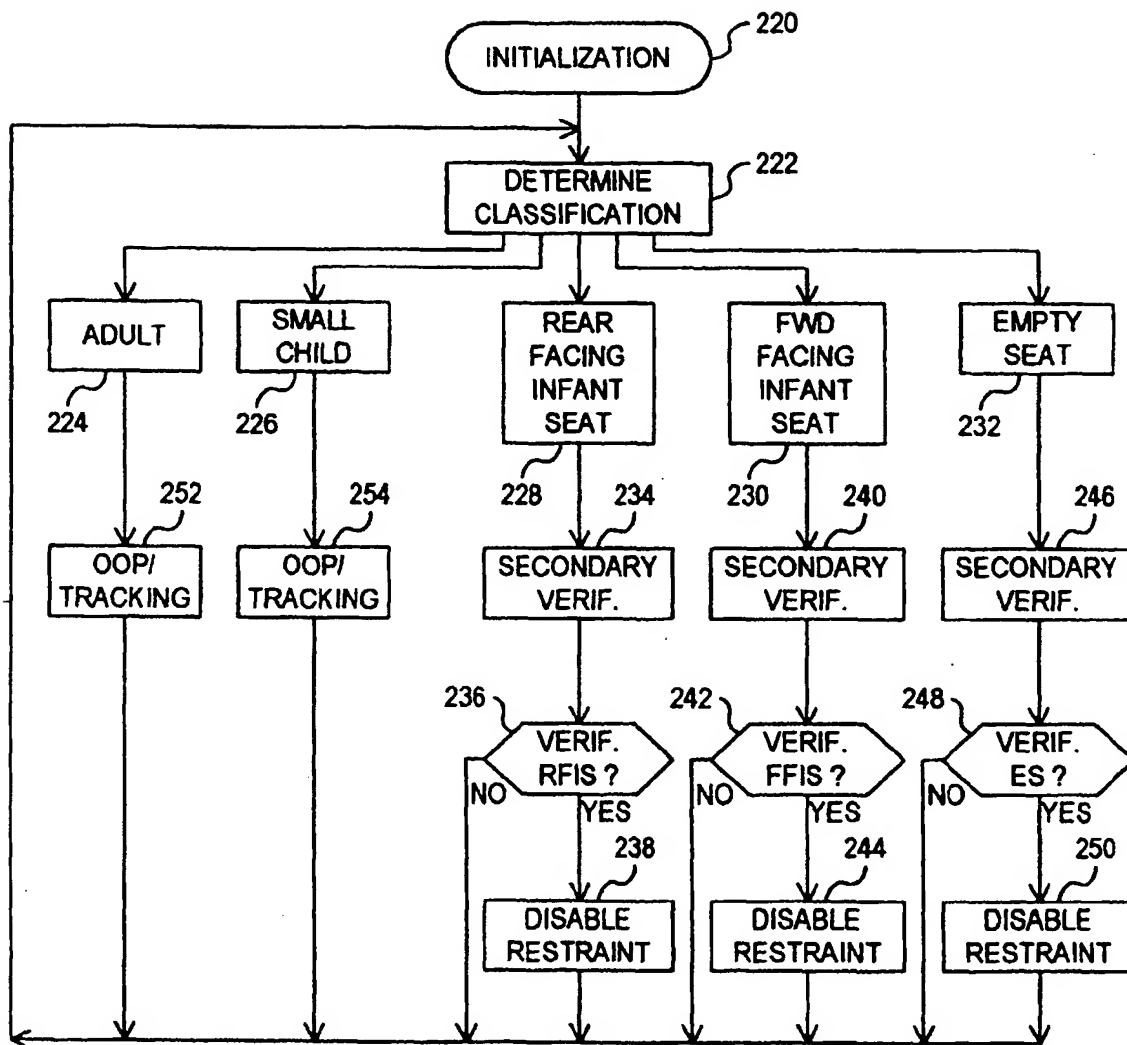


Fig.12.


	1,1	1,2	1,3	
	2,1	2,2	2,3	
OOP	3,1	3,2	3,3	OOP
	4,1	4,2	4,3	
	5,1	5,2	5,3	
	6,1	6,2	6,3	
	7,1	7,2	7,3	
	8,1	8,2	8,3	
	9,1	9,2	9,3	
	10,1	10,2	10,3	

256

Fig.13.

H1	C1	H3
C3	CRB	C4
H2	C2	H4

Fig.14.

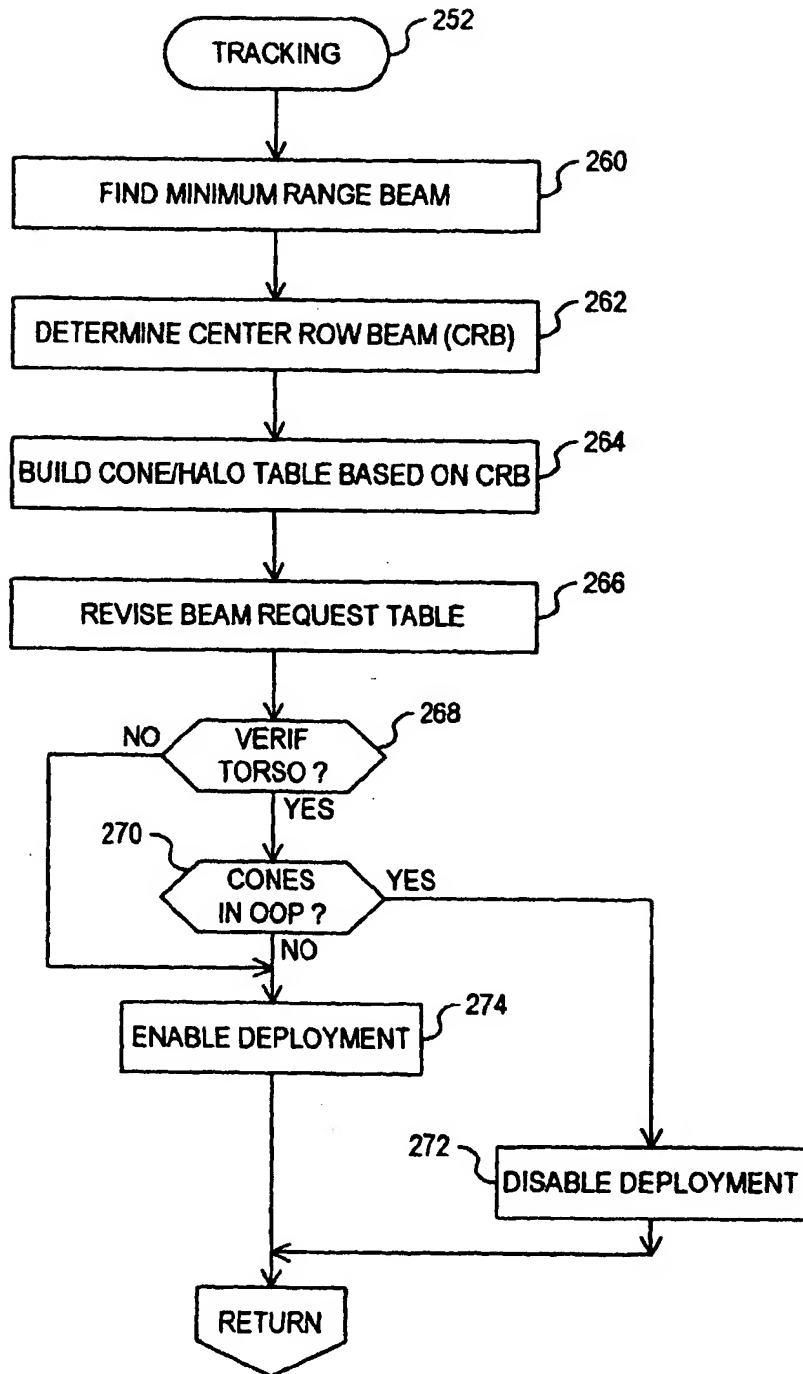

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 1 033 290 A3

(12)

EUROPEAN PATENT APPLICATION

(88) Date of publication A3:
24.04.2002 Bulletin 2002/17

(51) Int Cl.⁷: **B60R 21/01**, G01S 17/02,
G01S 17/42, H01L 27/00,
H01R 9/28, G09G 3/32

(43) Date of publication A2:
06.09.2000 Bulletin 2000/36

(21) Application number: 00200408.3

(22) Date of filing: 07.02.2000

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE**
Designated Extension States:
AL LT LV MK RO SI

- Griffin, Dennis
46060 Indiana (US)
- Perisho, Robert Jr.
46979 Indiana (US)
- Thayer, Peter
46060 Indiana (US)
- Wu, Cunkai
46902 Indiana (US)

(30) Priority: 01.03.1999 US 260224

(71) Applicant: Delphi Technologies, Inc.
Troy, MI 48007 (US)

(74) Representative: Denton, Michael John
Delphi Automotive Systems,
Centre Technique Paris,
117 avenue des Nations,
B.P. 60059
95972 Roissy Charles de Gaulle Cédex (FR)

(72) Inventors:
• Fultz, William
46033 Indiana (US)

(54) Infrared occupant position detection system and method for a motor vehicle

(57) An improved IR occupant position detection system (10) that provides accurate and reliable classification and position information at a speed sufficient to timely inhibit or otherwise control deployment of occupant restraints. A two-dimensional array (40) of IR emitters (L) is selectively activated to periodically illuminate two or more predetermined viewing planes (26, 28, 30) in the vicinity of a passenger seating area, and the reflected IR energy is detected by a photo-sensitive receiver (24) and analyzed to detect the presence of an occupant, to classify the occupant, and to identify and dynamically track the position of the occupant's head/torso relative to predefined zones of the passenger compartment. Modulating the intensity of the emitted IR beams with a known carrier frequency, band-pass filtering the received signal, and synchronously detecting the filtered signal distinguishes the reflected IR energy from other signals picked up by the IR receiver (24). Additionally, a two stage adaptive control mechanism compensates for the variation in intensity of the reflected energy with distance between the emitter and the occupant. The emitter (40) is implemented with orthogonal anode and cathode power rails with individual IR LED elements (L) placed at each anode-cathode intersection. Optical dispersion within the package is greatly reduced by an opaque cover layer (64) that effectively forms a well for

each LED element (L).

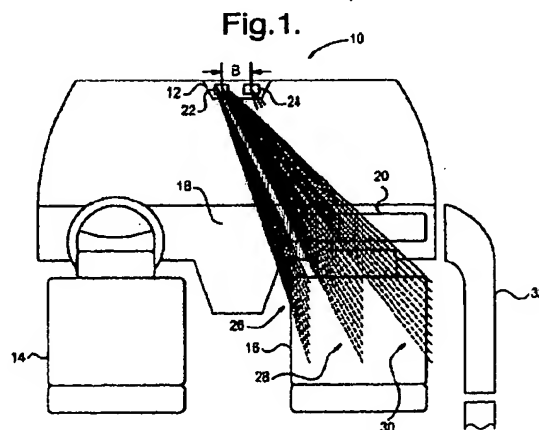


Fig. 1.

EP 1 033 290 A3



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 00 20 0408

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	WO 94 22693 A (AUTOMOTIVE TECH INT) 13 October 1994 (1994-10-13)	1	B60R21/01
Y	* page 31, paragraph 2 - page 32, paragraph 1 *	2-5,9, 11,14-19	G01S17/02 G01S17/42 H01L27/00 H01R9/28 G09G3/32
Y	US 5 482 314 A (CORRADO ANTHONY P ET AL) 9 January 1996 (1996-01-09) * column 6, line 56 - column 7, line 4 * * column 16, line 42 - column 17, line 28 * * column 17, line 55 - column 18, line 30 * * column 23, line 60 - column 24, line 3 * * column 23, line 60 - column 24, line 3 *	2-8	
X	US 5 737 083 A (PRZYTULA K WOJTEK ET AL) 7 April 1998 (1998-04-07)	11,13,19	
Y	* the whole document *	3,8,12, 20	
Y	GB 1 552 369 A (MARTIN MARIETTA CORP) 12 September 1979 (1979-09-12) * page 1, line 12-20 * * page 3, line 5 - page 4, line 13 *	5-8	TECHNICAL FIELDS SEARCHED (Int.Cl.7) H03G G01S H01L B60R H01R G09G H04N
Y	US 3 516 751 A (FRUENGEL FRANK) 23 June 1970 (1970-06-23) * the whole document *	5-8	
Y	DE 297 07 630 U (LEUZE ELECTRONIC GMBH & CO) 3 July 1997 (1997-07-03) * page 1, line 7-32 *	5-8	

	-/--		
The present search report has been drawn up for all claims			
Place of search MUNICH		Date of completion of the search 8 February 2002	Examiner Plenk, R
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03 82 (P04C01)



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 00 20 0408

DOCUMENTS CONSIDERED TO BE RELEVANT				
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)	
Y	PATENT ABSTRACTS OF JAPAN vol. 1998, no. 11, 30 September 1998 (1998-09-30) & JP 10 157561 A (NIPPON SOKEN INC; TOYOTA MOTOR CORP), 16 June 1998 (1998-06-16) * the whole document *	9-12, 19		
Y	DE 196 44 565 A (TEVES GMBH ALFRED) 30 April 1998 (1998-04-30) * column 2, line 3 - column 3, line 62 *	9, 10		
X	MARSZALEC J ET AL: "A LED-array-based range-imaging sensor for fast three-dimensional shape measurements" SENSORS AND ACTUATORS A, ELSEVIER SEQUOIA S.A., LAUSANNE, CH, vol. 47, no. 1-3, March 1995 (1995-03), pages 501-505, XP004310532 ISSN: 0924-4247 * the whole document *	11, 19-24		
X	EP 0 623 829 A (SICK OPTIK ELEKTRONIK ERWIN) 9 November 1994 (1994-11-09) * claim 1 *	11		TECHNICAL FIELDS SEARCHED (Int.Cl.7)
Y	EP 0 775 921 A (BAYERISCHE MOTOREN WERKE AKTIENGESELLSCHAFT) 28 May 1997 (1997-05-28) * the whole document *	11		
Y	WO 98 21704 A (AUTO SENSE LTD ; JUDS SCOTT (US)) 22 May 1998 (1998-05-22) * page 1, line 15-33 * * page 9, line 19 - page 10, line 30 *	11, 19		
Y	EP 0 809 228 A (MOTOROLA INC) 26 November 1997 (1997-11-26) * column 4, line 41-52 *	14-16		
The present search report has been drawn up for all claims				
Place of search MUNICH		Date of completion of the search 8 February 2002	Examiner Plenk, R	
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document		

EPO FORM 1503 03.92 (P04C01)



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 00 20 0408

DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
Y	WO 96 36959 A (PHILIPS ELECTRONICS NV ;PHILIPS NORDEN AB (SE)) 21 November 1996 (1996-11-21) * page 4, line 8-24; figure 1 *	14-16	
Y	DE 87 07 160 U (GEBR. NEUWEGER GMBH & CO KG (DE)) 23 July 1987 (1987-07-23) * the whole document *	14-16	
Y	US 5 639 158 A (SATO YUKO) 17 June 1997 (1997-06-17) * column 2, line 44-67; figures 1A,1B *	17,18	
Y	US 5 475 417 A (OGATA HIROMI ET AL) 12 December 1995 (1995-12-12) * column 2, line 51 - column 3, line 16 *	17,18	
Y	US 5 585 625 A (SPIES MARTIN) 17 December 1996 (1996-12-17) * the whole document *	20	
A		11,14,19	TECHNICAL FIELDS SEARCHED (Int.Cl.7)
The present search report has been drawn up for all claims			
Place of search MUNICH		Date of completion of the search 8 February 2002	Examiner Plenk, R
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons</p> <p>& : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03.02 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 00 20 0408

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

08-02-2002

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 9422693	A	13-10-1994	DE 4492128 T0	27-06-1996
			JP 9501120 T	04-02-1997
			US 6039139 A	21-03-2000
			WO 9422693 A1	13-10-1994
			US 6141432 A	31-10-2000
			US 6270116 B1	07-08-2001
			US 6283503 B1	04-09-2001
			US 6168198 B1	02-01-2001
			US 5835613 A	10-11-1998
			US 5822707 A	13-10-1998
			US 5748473 A	05-05-1998
			US 5845000 A	01-12-1998
			US 5653462 A	05-08-1997
			US 6234520 B1	22-05-2001
			US 6254127 B1	03-07-2001
			US 5829782 A	03-11-1998
			US 2001015547 A1	23-08-2001
			US 2001024032 A1	27-09-2001
			US 2001029416 A1	11-10-2001
			US 2001038698 A1	08-11-2001
			US 5848802 A	15-12-1998
			US 6186537 B1	13-02-2001
US 5482314	A	09-01-1996	AU 682267 B2	25-09-1997
			AU 2388695 A	30-10-1995
			CN 1150407 A ,B	21-05-1997
			EP 0757635 A1	12-02-1997
			JP 10503445 T	31-03-1998
			WO 9527635 A1	19-10-1995
			US 6272411 B1	07-08-2001
			US 5890085 A	30-03-1999
US 5737083	A	07-04-1998	NONE	
GB 1552369	A	12-09-1979	DE 2659204 A1	29-06-1978
			FR 2377728 A1	11-08-1978
			NL 7700102 A	11-07-1978
US 3516751	A	23-06-1970	DE 1194450 B	
			GB 1088254 A	25-10-1967
DE 29707630	U	03-07-1997	DE 29707630 U1	03-07-1997
JP 10157561	A	16-06-1998	NONE	
DE 19644565	A	30-04-1998	DE 19644565 A1	30-04-1998

EPO FORM P0489

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 00 20 0408

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

08-02-2002

Patent document cited in search report		Publication date		Patent family member(s)	Publication date
EP 0623829	A	09-11-1994	DE	4312186 A1	20-10-1994
			DE	59404303 D1	20-11-1997
			EP	0623829 A1	09-11-1994
EP 0775921	A	28-05-1997	DE	19543402 A1	22-05-1997
			EP	0775921 A1	28-05-1997
			JP	9178857 A	11-07-1997
WO 9821704	A	22-05-1998	AU	5177898 A	03-06-1998
			EP	0938722 A1	01-09-1999
			JP	2001504228 T	27-03-2001
			WO	9821704 A1	22-05-1998
EP 0809228	A	26-11-1997	US	5751263 A	12-05-1998
			CN	1185686 A	24-06-1998
			EP	0809228 A2	26-11-1997
			JP	10063227 A	06-03-1998
WO 9636959	A	21-11-1996	EP	0771459 A2	07-05-1997
			WO	9636959 A2	21-11-1996
			US	6014119 A	11-01-2000
DE 8707160	U	23-07-1987	DE	8707160 U1	23-07-1987
US 5639158	A	17-06-1997	JP	2725650 B2	11-03-1998
			JP	8111545 A	30-04-1996
US 5475417	A	12-12-1995	JP	5121786 A	18-05-1993
			JP	3197303 B2	13-08-2001
			JP	5121787 A	18-05-1993
			JP	2989343 B2	13-12-1999
			JP	5116374 A	14-05-1993
			DE	4235167 A1	29-04-1993
			GB	2262069 A ,B	09-06-1993
			KR	230756 B1	15-11-1999
US 5585625	A	17-12-1996	DE	4400664 A1	03-08-1995
			DE	59406498 D1	27-08-1998
			EP	0669227 A1	30-08-1995
			ES	2122139 T3	16-12-1998

EPO FORM P445

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82